

Agilent 86105C High Sensitivity, Broad Wavelength Plug-In Module

Test the widest range of telecom and datacom wavelengths and transmission rates in the industry with the 86105C multi-rate compliance filter module.

The 86105C Infiniium DCA-J plug-in module offers unprecedented wavelength and optical filter coverage for SONET/SDH and datacom/enterprise technologies up to 11.3 Gb/s.

With the increased need to address the bottleneck concerns within the enterprise and telecom networks, network equipment elements and their components need to be engineered with flexibility, performance and cost in mind. The 86105C now allows designers and manufacturers to test transmitter compliance and perform waveform characterization on multiple technologies and data rates with a single module.

Component/system design manufacturing

The 86105C gives designers and manufacturers the ability to accurately characterize the transmission performance of components and systems that cross the boundary between telecom (e.g. SONET/SDH) and datacom/enterprise (e.g. Ethernet) technologies. Such examples include 10 Gb/s 200/300 pin MSA transponders which may be designed to conform to different standards and different data rates. Also, new devices are being designed for emerging standards, such as Xena for 10 Gb Ethernet or small form factor (SFF and SFP) transceivers for the OC-48 market.



10 Gb SONET transmission has various specified rates depending on the technology being implemented and the network being designed. The OC-192 rate is 9.953 Gb/s. The rate goes up to 10.664 Gb/s with the addition of Forward Error Correction (FEC). In addition there is now OTN G.709, which adds additional network control and further increases the rate to 10.71 Gb/s. To meet this increased transmission speed, components must scale and be tested accordingly.

Future-proofing through unprecedented filter rate coverage

Data rate	Standard	86105C-100 Series*	Option 86105C-200	Option* 86105C-300
155 Mb/s	OC-3	Option 110		Option 110
622 Mb/s	OC-12	120		120
1063 Mb/s	Fibre Channel	130		130
1250 Mb/s	GbE	140		140
2125 Mb/s	2x Fibre Channel	150		150
2488 Mb/s	OC-48	160		160
2500 Mb/s	2x GbE, InfiniBand	160		160
2666 Mb/s	OC-48 (FEC)	170		170
3125 Mb/s	10 GbE LX-4	180**		180**
4250 Mb/s	4x Fibre Channel	190**		190**
8500 Mb/s	8x Fibre Channel	197**		197**
5000 Mb/s		193**		193**
6250 Mb/s		195**		195**
9.953 Gb/s	OC-192		X	X
10.3125 Gb/s	10 GbE		X	X
10.51875 Gb/s	10 G Fibre Channel		X	X
10.664 Gb/s	OC-192 (FEC)		X	X
10.709 Gb/s	OC-192 (ITU-T G.709)		X	X
11.096 Gb/s	10 GbE FEC		X	X
11.317 Gb/s	10 G Fibre Channel		X	X

*Choose any 4 low-rate filters **Additional charges apply

Specifications

Bandwidth	9 GHz optical and 20 GHz electrical
Wavelength	750-1650 nm
Sensitivity (typical)	-21 to -16 dBm based on rate and wavelength
RMS noise (typical)	0.8 to 2.5 μW
Fibre input	62.5 μm accepts single mode or multi-mode



Agilent Technologies

In the midst of proliferating data rates, the 86105C covers the datacom/enterprise standards such as 10 Gb Ethernet and 10 G Fibre Channel, which run at 10.3125 Gb/s and 10.51875 Gb/s respectively. Switching and routing systems are required to interface some of these technologies (specifically the IEEE 802.3 Ethernet standards and SONET) at varying rates. Therefore, the ability to test and characterize performance across a wide range of technologies and data-rates is essential in the R&D and manufacturing environments.

Multi-port and multi-rate system/component designers and manufacturers can take advantage of both the wide filter coverage and outstanding sensitivity of the 86105C. This module makes possible the characterization of optical transmission performance of all SONET, Ethernet, and Fibre Channel technologies, from 155 Mb/s through 11.3 Gb/s. In addition, new Infiniium DCA-J 86100C software now provides industry-leading jitter characterization.



Agilent Email Updates

www.agilent.com/find/emailupdates

Get the latest information on the products and applications you select.

For more information on Agilent Technologies' products, applications or services, please contact your local Agilent office. The complete list is available at:

www.agilent.com/find/contactus

Americas

Canada	(877) 894-4414
Latin America	305 269 7500
United States	(800) 829-4444

Asia Pacific

Australia	1 800 629 485
China	800 810 0189
Hong Kong	800 938 693
India	1 800 112 929
Japan	0120 (421) 345
Korea	080 769 0800
Malaysia	1 800 888 848
Singapore	1 800 375 8100
Taiwan	0800 047 866
Thailand	1 800 226 008

Europe & Middle East

Austria	0820 87 44 11
Belgium	32 (0) 2 404 93 40
Denmark	45 70 13 15 15
Finland	358 (0) 10 855 2100
France	0825 010 700*
	*0.125 €/minute
Germany	01805 24 6333**
	**0.14 €/minute
Ireland	1890 924 204
Israel	972-3-9288-504/544
Italy	39 02 92 60 8484
Netherlands	31 (0) 20 547 2111
Spain	34 (91) 631 3300
Sweden	0200-88 22 55
Switzerland	0800 80 53 53
United Kingdom	44 (0) 118 9276201

Other European countries:

www.agilent.com/find/contactus

Revised: March 27, 2008


Product specifications and descriptions in this document subject to change without notice.

© Agilent Technologies, Inc. 2005, 2006, 2008

Printed in USA, May 5, 2008

5989-1604EN

Eye and mask for 10.709 Gb/s using typical optical module

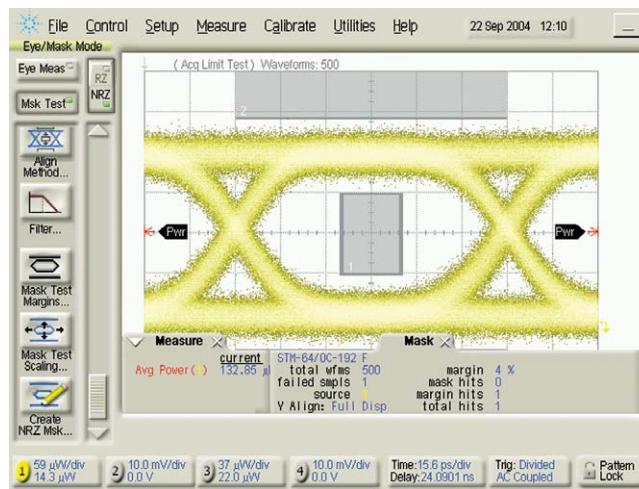

Improved mask margin using 86105C

