


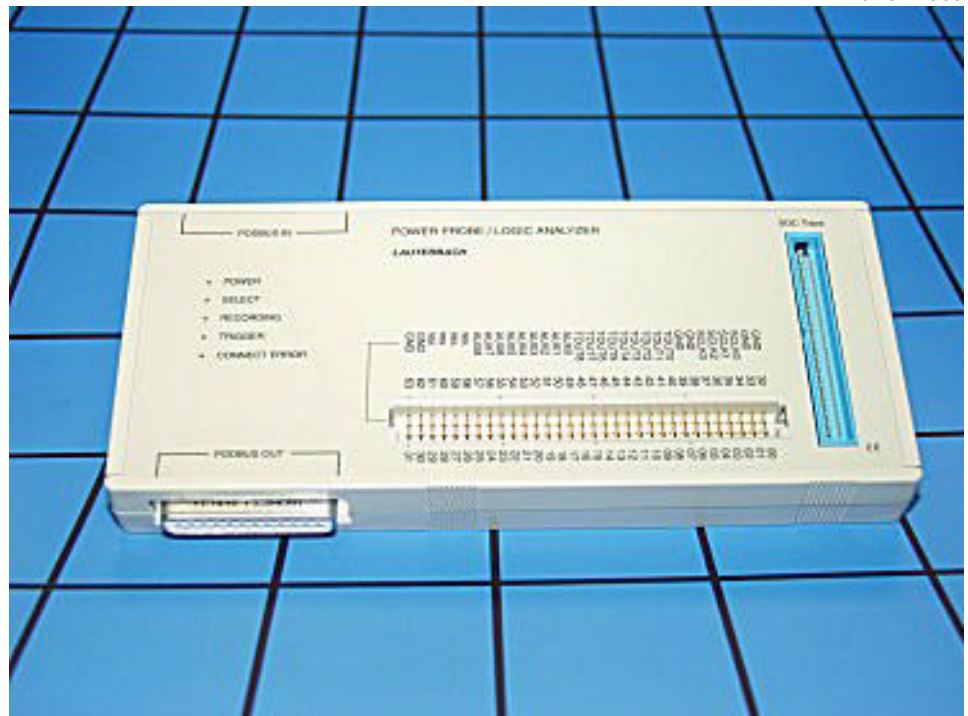

PowerProbe - Logic and Protocol Analyzer


- Timing Analyzer up to 400 MHz
- State Analyzer up to 100 MHz
- 64 Input Channels
- Transient Recording
- Time Correlation with RISC Trace
- Clock Qualifier for State Clock
- Mixed State and Timing Mode
- 4 State Clock Inputs
- Optional FPGA Onchip Trace
- Optional Pattern Generator
- Protocol Support for CAN, USB, etc.

The Timing/State Analyzer Module is special designed for microprocessor applications. It can work separately or in conjunction with all ICD modules. The high-speed transient recording allows very long record time when tracing peripheral lines in a microcontroller application.


Functional Units

Schematics

PowerProbe

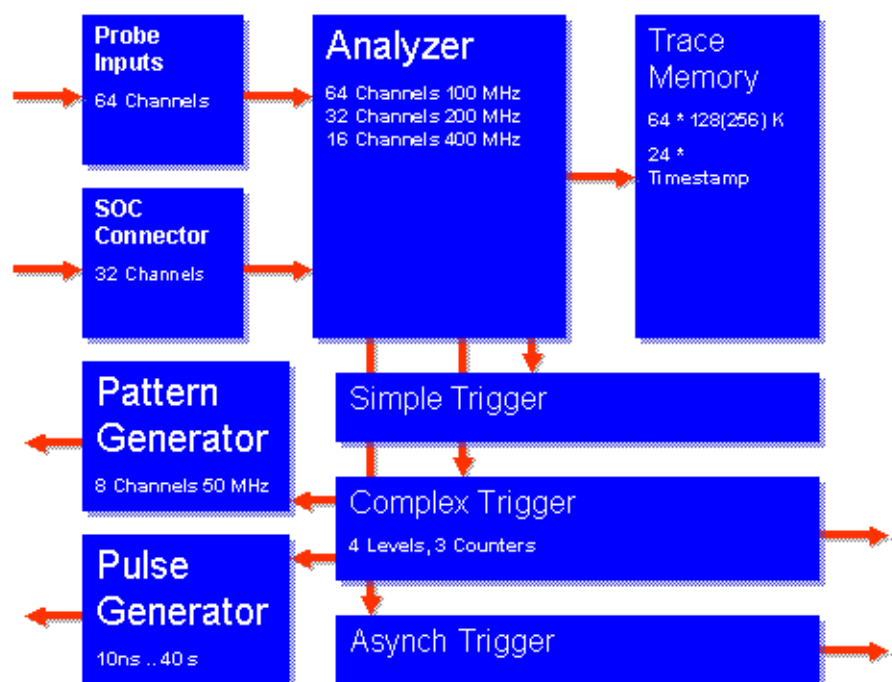

System Features

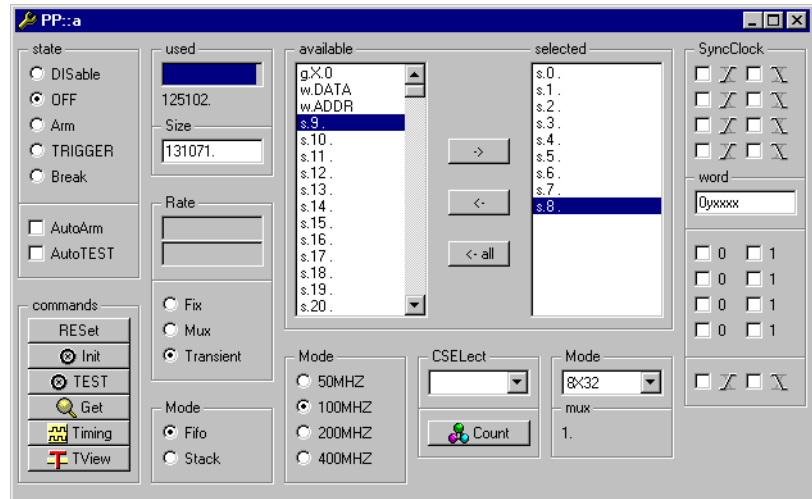


- ☐ Timing Analyzer with
 - Trace up to 400 MHz
 - Transient recording
 - Simple trigger function
 - Complex trigger function
- ☐ Pattern Generator, which can supply 9 channels with a resolution of 20ns
- ☐ SOC Connector
- ☐ Pulse Generator
- ☐ Universal Counter


Trace

Inputs

- ☐ 64 Inputs
- ☐ 100 KOhm 7 pF 100 Ohm ser.
- ☐ -0.5..10V
- ☐ 1.0 or 1.4 V threshold level separately definable per group
- ☐ 4 groups with 16 lines each
- ☐ Probe compensation

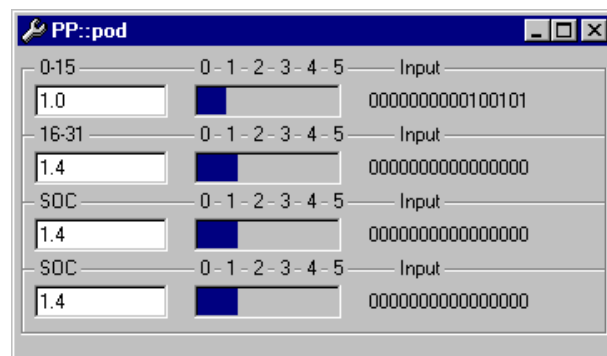

Logical names for input Lines

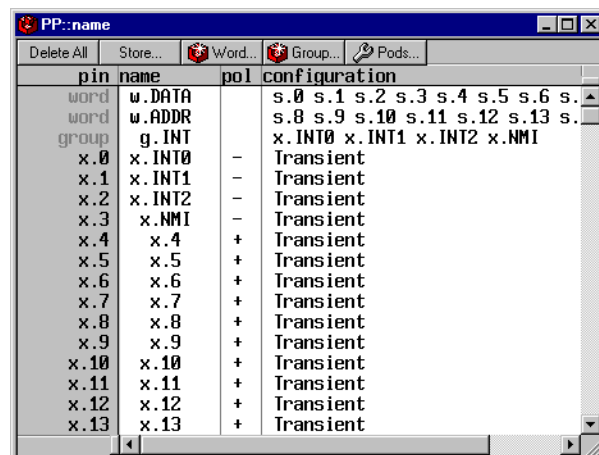

- ☐ Polarity
- ☐ Sample Mode
- ☐ Groups
- ☐ Words

Max. 64 Channels

5 operating modes:

- ☐ 64 channels asynchronous 100 MHz
- ☐ 32 channels asynchronous 200MHz
- ☐ 16 channels asynchronous 400MHz
- ☐ Up to 32 channels synchronous, 4 clock inputs
- ☐ Transient mode

Transient Recording over Required Time

Transient sensitivity can be activated independently for each group. That means, the sampling of the input lines is stored to the trace buffer by the change of the input level only.

The total record time depends on the occurrence of changes on the input signals. The minimum time for high speed signals is 1.2 ms. The max. trace length can be 6.5 h.

Trace Buffer

The depth of the trace buffer is 128K or 256K frames.
Each input probe can be used for synchronous or asynchronous events (mixed mode timing/state).


In synchronous mode each recorded frame is marked by a time stamp with a resolution of 10ns.

Display

PP::a.l.g.int.w.data.w.addr.ti.ref

record	int0	int1	int2	.nmi	.str	ta	dr	ti.ref
+00051743						BB	99	-0.013us
+00051744						BB	99	-0.010us
+00051745						BB	99	-0.008us
+00051746						BB	99	-0.005us
+00051747						BB	99	-0.003us
+00051748	-	-	-	-	-	BB	99	0.000
+00051749						BB	99	0.003us
+00051750						BB	99	0.005us
+00051751						BB	99	0.008us
+00051752						BB	99	0.010us
+00051753						BC	99	0.013us
+00051754						BC	99	0.015us
+00051755						BC	99	0.018us
+00051756						BC	99	0.020us
+00051757						BF	99	0.023us
+00051758						BF	99	0.025us
+00051759						BF	99	0.028us
+00051760						BF	99	0.030us
+00051761						BC	99	0.033us
+00051762						BC	99	0.035us

State Display

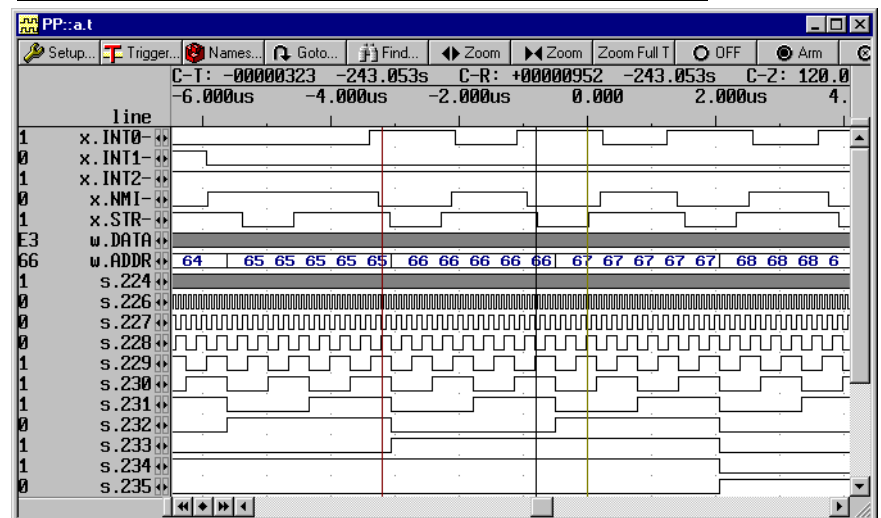


Timing Display

The contents of the trace buffer can be displayed in a tabular form or as a timing

diagram.

Signal Analysis

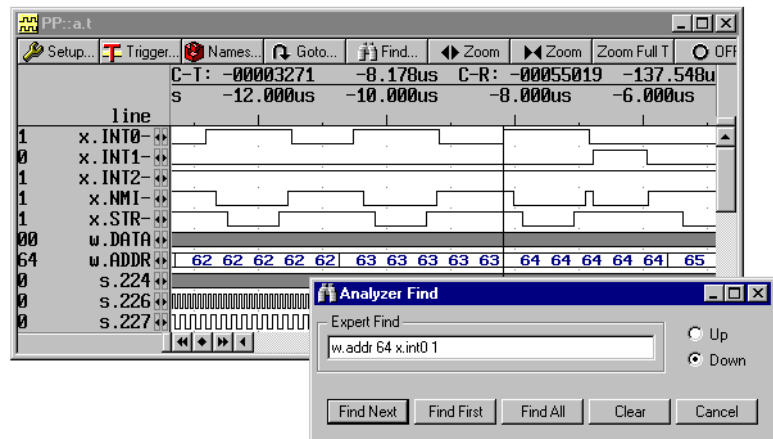

- ☐ LOAD and SAVE
- ☐ COMPARE
- ☐ FIND
- ☐ Tracking

Master-Slave Operation

- ☐ The timing analyzer can trigger the other TRACE32 analyzers (high speed state analyzer or port analyzer)
- ☐ The timing analyzer can be triggered by the other TRACE32 analyzers.

Output Formats


- ☐ Binary
- ☐ ASCII
- ☐ VHDL
- ☐ Verilog

Option SOC Adapter

Function


The SOC adaption is a simple way of analyzing internal nodes in FPGAs or ASICs. By integration of a scanner module up to 1024 channels can be

traced inside a silicon system. The SOC adaption is scalable up to 32 multiplexed signals.

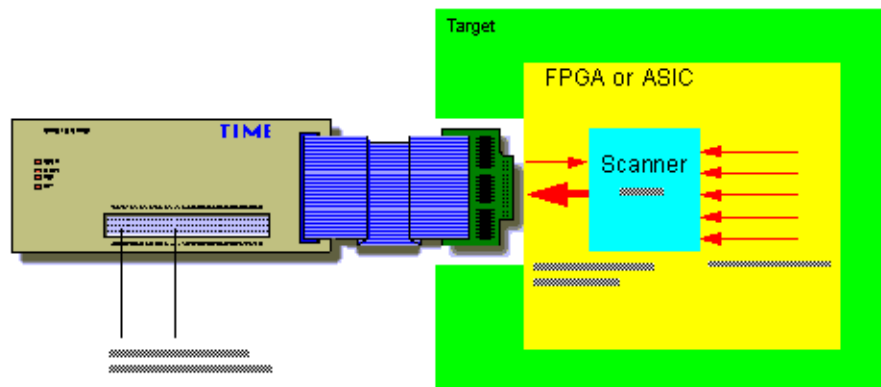

Scanner Module


The scanner module is available in VHDL, Verilog or AHDL.

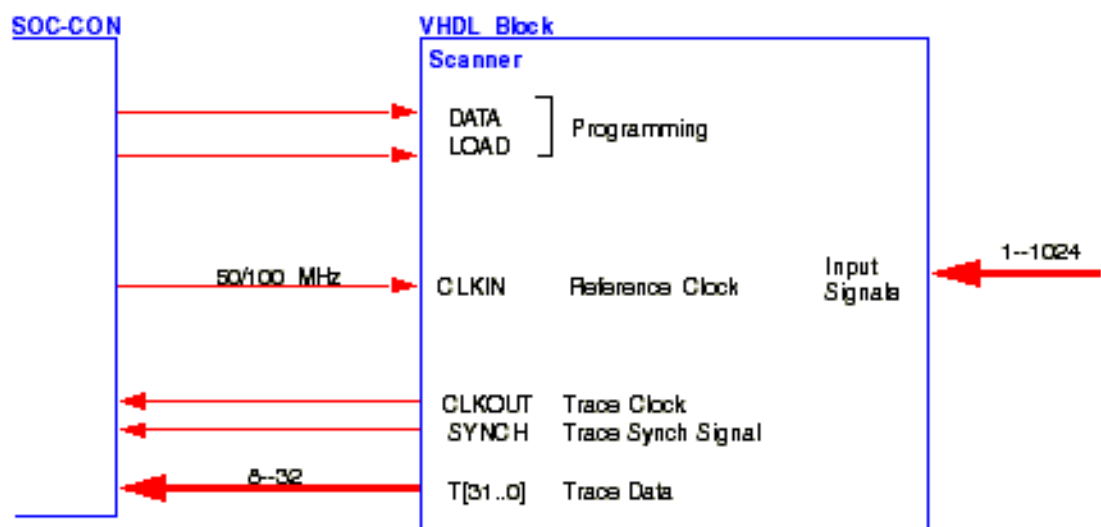

Connector

Connector type is

SAMTEC FTE-120-xxxx



Signals Connector Version A 32 Bit

Signal	Pin	Pin	Signal
GND	1	2	LOAD
DATA	3	4	CLKIN
CLKOUT	5	6	SYNCH
T00	7	8	T01
T02	9	10	T03
T04	11	12	T05
T06	13	14	T07
GND	15	16	VCC
T08	17	18	T09
T10	19	20	T11
T12	21	22	T13
T14	23	24	T15
T16	25	26	T17
T18	27	28	T19
T20	29	30	T21
T22	31	32	T23
T24	33	34	T25
T26	35	36	T27
T28	37	38	T29
T30	39	40	T31


Signals Connector Version A 16 Bit

Signal	Pin	Pin	Signal
GND	1	2	LOAD
DATA	3	4	CLKIN
CLKOUT	5	6	SYNCH
T00	7	8	T01
T02	9	10	T03
T04	11	12	T05
T06	13	14	T07
GND	15	16	VCC
T08	17	18	T09
T10	19	20	T11
T12	21	22	T13
T14	23	24	T15

Signals Connector Version A 8 Bit

Signal	Pin	Pin	Signal
GND	1	2	LOAD
DATA	3	4	CLKIN
CLKOUT	5	6	SYNCH
T00	7	8	T01
T02	9	10	T03
T04	11	12	T05
T06	13	14	T07
GND	15	16	VCC

Connector MICTOR

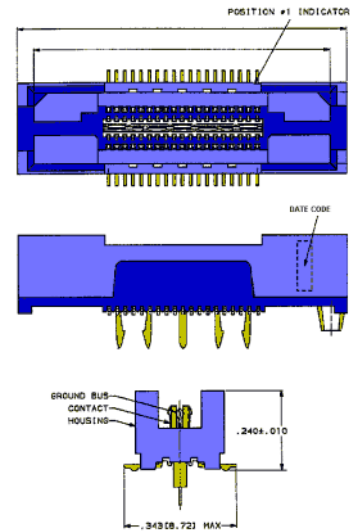

Signal Connector Version B (MICTOR)


Signal	Pin	Pin	Signal
VCC	1	2	LOAD-
CLKIN	3	4	DATA
CLKOUT	5	6	SYNCH
T15	7	8	T31
T14	9	10	T30
T13	11	12	T29
T12	13	14	T28
T11	15	16	T27
T10	17	18	T26
T09	19	20	T25
T08	21	22	T24
T07	23	24	T23
T06	25	26	T22
T05	27	28	T21
T04	29	30	T20
T03	31	32	T19
T02	33	34	T18
T01	35	36	T17
T00	37	38	T16

Complex Trigger System (optional)

Trigger

- ☐ Trigger Conditions
 - HIGH, LOW or DONTCARE for each input
 - Range trigger definitions for each group
- ☐ 8 Trigger Events
 - 8 global event, no death time
- ☐ Trigger Filter

Freely programmable Trigger Sequencer

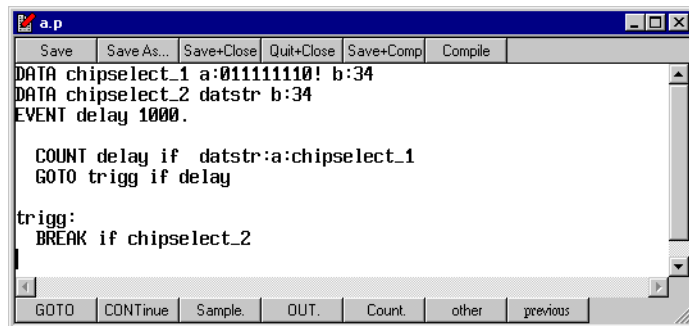

- ☐ Programmable trigger delay 0 to 100% of records
- ☐ Triggering of other system units

Input variables

- Trigger events from input
- Bus trigger lines A
- Event counter actions/operations
- Acquisition ON/OFF
- Trigger
- Bus trigger lines A
- Counter enable
- Counter restart
- Sequential triggering through 4 levels

Pretrigger Delay

The pretrigger delay prevents from immediate triggering which generates an nearly empty trace storage. The value can be defined between 0 and 100% of the trace storage.


Trigger Delay

The trigger delay can be 0 to 100 s or 0 to 1000% of the trace storage.

- ☐ 3 retriggerable 45 bit Counters in trigger system
 - Time window definition
- ☐ Triggering through bus trigger lines

Simple Trigger

Function

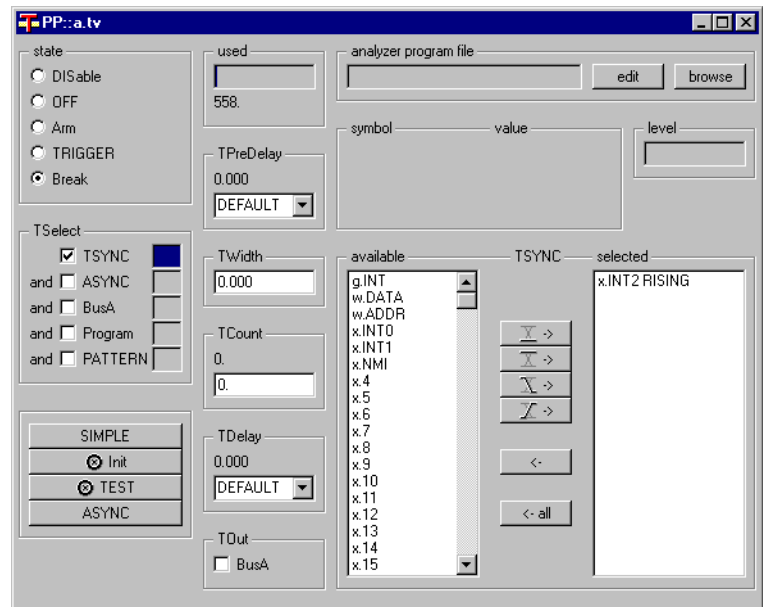



The simple trigger systems brings the easy trigger function of a scope to the logic analyzer. Trigger conditions can be set by mouse without any keyboard interaction.

Trigger Comparator


Every input can be used as high, low, rising or falling edge. More than one edge can be combined to generate a valid trigger event.

- ☐ Trigger Events
 - Don't care
 - Low
 - High
 - Rising
 - Falling

Direct setting with mouse

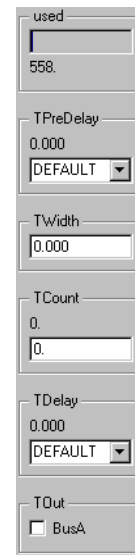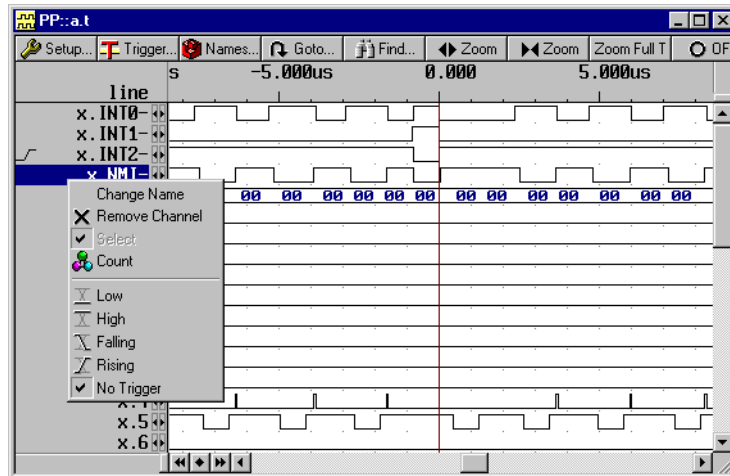

Selection Menu

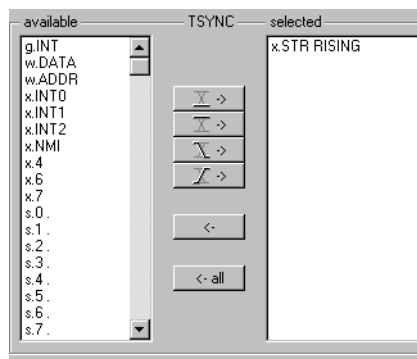

Other Trigger Inputs

- ☐ Intertrigger Bus
 - BUS A
- ☐ Asynchronous Trigger
- ☐ Pattern Generator

Trigger Filters

Trigger Filter

The trigger filter can filter out glitches or runs on the lines. The trigger filter can be set from 0 to 2.5 μ s.

Trigger Counter

The trigger count can be defined from 0 to 16 Mio. trigger events


Pretrigger Delay

The pretrigger delay prevents from immediate triggering which generates an nearly empty trace storage. The value can be defined between 0 and 1000% of the trace storage.


Trigger Delay

The trigger delay can be 0 to 100 s or 0 to 1000% of the trace storage.

Asynchronous Trigger System

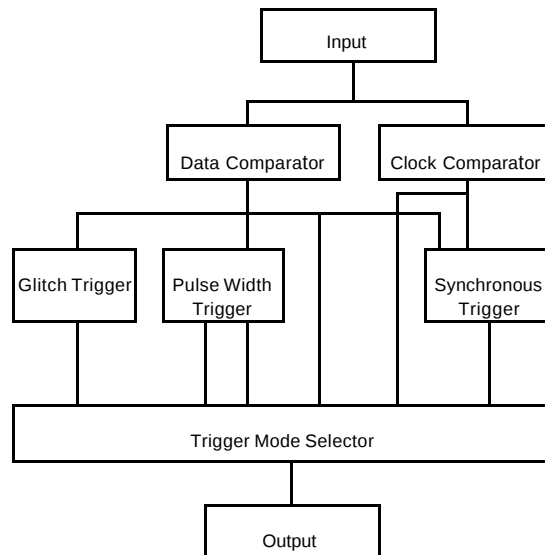

The asynchronous trigger system can be used to trigger on high-speed events, which are not synchronous to the CPU clock or bus cycle. The trigger reacts on events shorter than 3 ns.

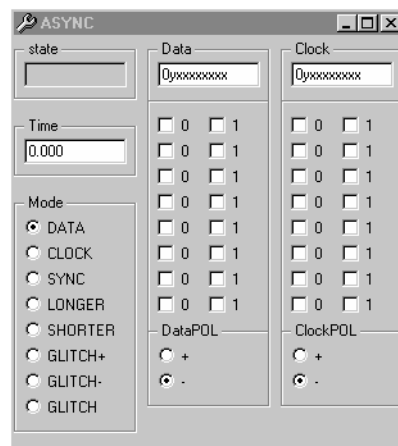

The trigger output can be used to trigger the port analyzer, the emulator or switched to the frequency counter. Events up to 100 MHz can be measured.


- ☐ **Data**
 - Combines 8 Inputs to one trigger signal
 - High, Low, Don't Care for every bit
 - Positive and negative polarity for trigger output
- ☐ **Clock**
 - Same as Data, but 2nd comparator
- ☐ **SYNC**
 - Combination of Data and Trigger event
 - Positive and negative Clock edge
 - True and false data event
- ☐ **LONGER**
 - Pulse width trigger
 - 10ns .. 3 ms
 - Positive and negative pulse
- ☐ **SHORTER**
 - Pulse width trigger
 - 10ns .. 3 ms
 - Positive and negative pulse
- ☐ **GLITCH+**
 - Glitch trigger on positive pulse
 - 2..10ns detection
- ☐ **GLITCH-**
 - Glitch trigger on negative pulse
 - 2..10ns detection

 GLITCH

- Glitch trigger on positive or negative pulse
- 2..10ns detection

Activity Display


Every port or external line level or pulse activity can be displayed.

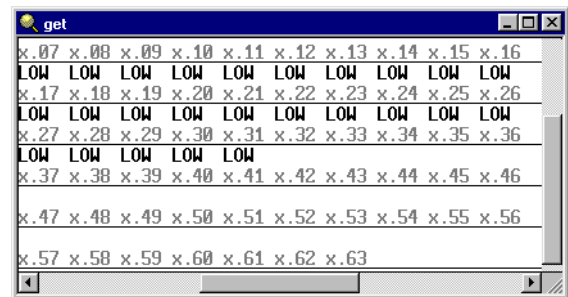

Counter System

Every signal can be selected for the universal counter system on the Trace32 FIRE. Event count and pulse width measurement is possible as well

a frequency test on CPU signals. On external inputs up to 100 MHz for input clocks is possible (Frequency only).

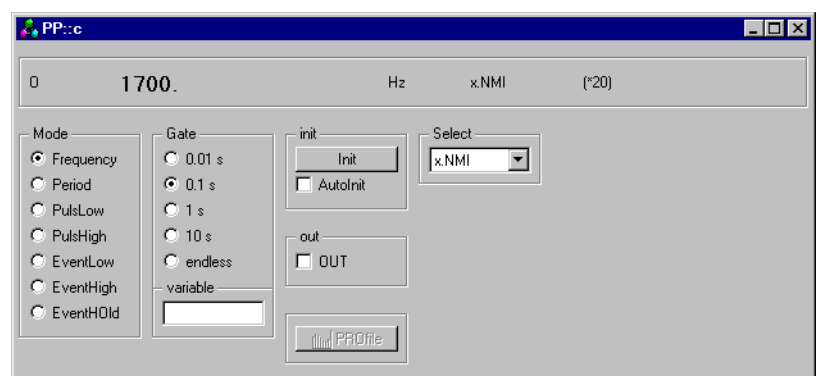

Pulse Generator

Rate Generator


☐ 10 ns .. 40s

Pulse Width


☐ 10ns .. 40s

Trigger

- ☐ Extern
- ☐ Analyzer Trigger
- ☐ BUS A
- ☐ Pattern Generator

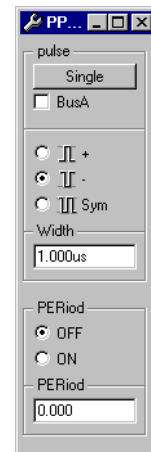

Option Pattern Generator

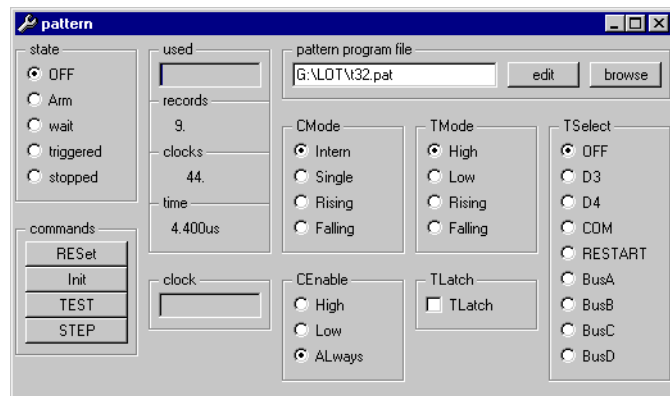

The pattern generator can supply the 16 channels on the connector C and D.

A output probe has to be used.

Channels

- ☐ 9 output lines on AUX0 .. AUX8
- ☐ 20 ns cycle time


Trigger

- ☐ Trigger latch mode
 - Stores trigger event
- ☐ Trigger Input
 - BUS A
 - External 4 Lines
- ☐ Trigger mode
 - High
 - Low
 - Rising
 - Falling
- ☐ Retrigger function
 - Wait for trigger
- ☐ Restart trigger output to BUS
 - BUS A

Clock

- ☐ Clock enable input
- ☐ External/internal clock
 - 50 MHz internal
 - 0 ...50 MHz external
 - Rising/falling edge
 - Single step
- ☐ Clock qualifier
 - High
 - Low
 - Don't care'


Programming

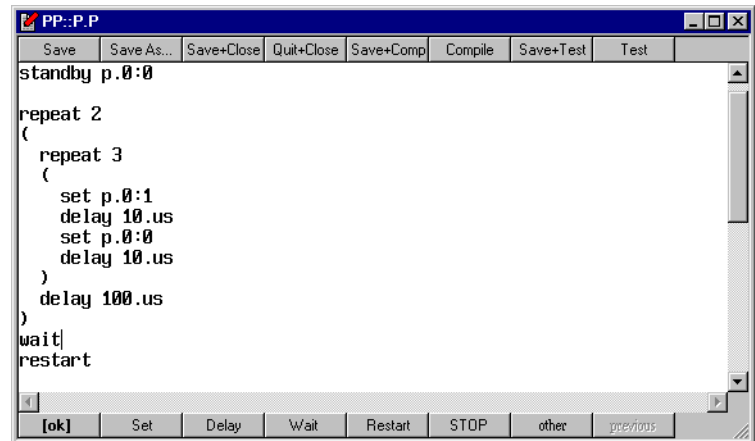

The programming of the pattern generator is done by a text window. Macros can be used for repeating the same sequence several times.

- ☐ Pattern Definition
 - Stand-by
 - Set
 - Repeat
 - ()
 - Delay
 - Wait
 - Restart
 - Stop

Pattern Display

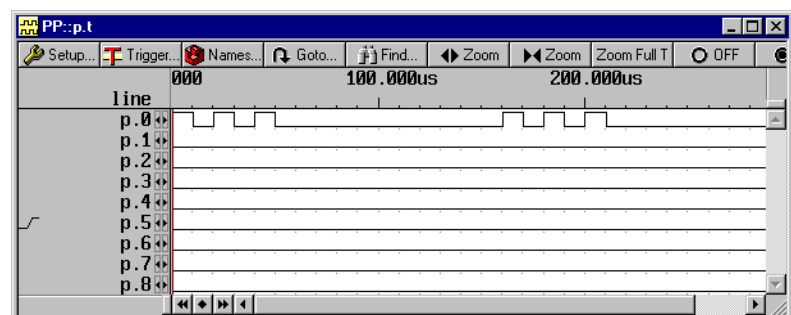

The defined pattern sequence can be displayed as a data listing or a timing diagram.

Order Information

Module Description

OrderNo Code	Text
LA-7930 ICD-PP	ICD PowerProbe State-Timing Analyzer 128K ICD State-Timing Analyzer, 64 Channels 100 MHz, 32 Channels 200 MHz, 16 Channel 400 MHz, Transient Recording, 128 KFrames, 48 Bit Time-Stamp, Trigger Filter, Trigger Delay, etc. Requires PODBUS-Interface, No SOC-CON Support
LA-7931 ICD-PP-256K	ICD PowerProbe State-Timing Analyzer 256K ICD State-Timing Analyzer, 64 Channels 100 MHz, 32 Channels 200 MHz, 16 Channels 400 MHz, Transient Recording, 256 KFrames, 48 Bit Time-Stamp, Complex Trigger, 8 Trigger Events, 4 Trigger Levels, 3 Counters (45 bit), Trigger Filter, Trigger Delay, etc., 50 MHz Pattern Generator (9 bit), Requires PODBUS-Interface, Option for SOC Trace
LA-7932 ICD-PP- SOCCON	Adapter for SOC-CON Adapter cable for SOC-CON, for tracing internal nodes in FPGAs and ASICs
LA-7933 ICD-PP- EXCALIBUR	Adapter EXCALIBUR / SOC-CON Converter EXCALIBUR (200 pin) to SOCCON (MICTOR)

Detailed Order Information

Order No.	Code	Text
LA-7930	ICD-PP	ICD PowerProbe State-Timing Analyzer 128K
LA-7931	ICD-PP-256K	ICD PowerProbe State-Timing Analyzer 256K
LA-7932	ICD-PP-SOCCON	Adapter for SOC-CON
LA-7933	ICD-PP- EXCALIBUR	Adapter EXCALIBUR / SOC-CON
Additional Options		
LA-6470	CLIPSET	Clip Set (Cable and Clips)

Order No.	Code	Text
LA-1370	MICTOR-FLEXEXT	Mictor Flex Extension

Contact

International Representative

Australia

Embedded Logic Solutions Pty L
Mr. Ramzi Kattan
391 Hume Highway
Bankstown NSW 2200
Phone: ++61 2 9793 9542
FAX: ++61 2 9790 1183
EMAIL: sales@emlogic.com.au

Austria

Lauterbach Datentechnik GmbH
Mr. Norbert Weiss
Fichtenstr. 27
D-85649 Hofolding
Phone: ++49 8104 8943 183
FAX: ++49 8104 8943 170
EMAIL: info_de@lauterbach.com

Belgium

Tritec Benelux B.V.
Mr. Robbert de Voogt
Stationspark 550
NL-3364 DA Slidrecht
Phone: ++31 184 41 41 31
FAX: ++31 184 42 36 11
EMAIL: software@tritec.nl

Brazil

ANACOM Software e Hardware Ltd
Mr. Rodrigo Ferreira
Rua Nazareth, 807, Bairro Barc
BR-09551-200 São Caetano do Sul
Phone: 0055 11 3422-4200
FAX: 0055 11 3422-4242
EMAIL: rferreira@anacom.com.br

Canada

Lauterbach Inc.
4 Mount Royal Ave.
USA-Marlborough, MA 01752
Phone: ++1 508 303 6812
FAX: ++1 508 303 6813
EMAIL: info_us@lauterbach.com

China

Watertek Inc.
Mr. Liu Ming
Room 1006, Hai Tai Building
No.229, North Si Huan Zhong Rd.
PRC-Beijing Hai Dian Distr., 100083
Phone: +86 10 82883933-680
FAX: +86 10 82883858
EMAIL: sales@watertek.com

Denmark

Nohau Danmark A/S
Mr. Flemming Jensen
Klausdalsbrovej 493
DK-2730 Herlev
Phone: ++45 44 52 16 50
FAX: ++45 44 52 26 55
EMAIL: info@nohau.dk

Egypt

Wantech
Mr. Nawara
5 Shafik Ghalie St., Suite 2
Off Pyramids Road, Giza
Cairo 12111
Phone: ++20 2 5848020
FAX: ++20 2 5877303
EMAIL: sales@wantech.net.com

Finland

Nohau
Mr. Leevi Lehtinen
Teknobulevardi 3-5
FI-01531 Vantaa
Phone: ++358 40 546 1469
FAX: ++358 9 2517 8101
EMAIL: leevi.lehtinen@nohau.se

France

Logic Instrument
Mr. Stephane Morice
BP 116
71, route de Saint-Denis
F-95170 Deuil la Barre
Phone: ++33 1 342861 70
FAX: ++33 1 342800 50
EMAIL: s.morice@logic-instrument.com

Germany

Lauterbach Datentechnik GmbH
Mr. Norbert Weiss
Fichtenstr. 27
D-85649 Hofolding
Phone: ++49 8104 8943 183
FAX: ++49 8104 8943 170
EMAIL: info_de@lauterbach.com

Germany North

Lauterbach Datentechnik GmbH
Mr. Klaus Hommann
Leonhardring 5
D-31319 Sehnde
Phone: ++49 5138 6185 0
FAX: ++49 5138 6185 3
EMAIL: klaus.hommann@lauterbach.com

India

Electro Systems Ass. Pvt. Ltd.
Mr. G. V. Gurunatham
4215 JK Complex First Main Rd.
IND-Bangalore 560 021
Phone: ++91 80 23577924
FAX: ++91 80 23475615
EMAIL: esaindia@vsnl.com

Ireland

Lauterbach Ltd.
Mr. Barry Lock
11 Basepoint Enterprise Centre
Stroudley Road
Basingstoke, Hants RG24 8UP
Phone: ++44-1256-333-690
FAX: ++44-1256-336-661
EMAIL: info_uk@lauterbach.com

Israel

Itec Ltd.
Mr. Mauri Gottlieb
P.O.Box 10002
IL-Tel Aviv 61100
Phone: ++972 3 6491202
FAX: ++972 3 6497661
EMAIL: general@itec.co.il

Italy

Lauterbach Srl
Mr. Maurizio Menegotto
Via Enzo Ferrieri 12
I-20153 Milano
Phone: ++39 02 45490282
FAX: ++39 02 45490428
EMAIL: info_it@lauterbach.com

Japan

Lauterbach Japan, Ltd.
Mr. Kenji Furukawa
3-9-5 Shinyokohama
Kouhoku-ku
Yokohama-shi, Japan 222-0033
Phone: ++81-45-477-4511
FAX: ++81-45-477-4519
EMAIL: info@lauterbach.co.jp

Luxemburg

Tritec Benelux B.V.
Mr. Robbert de Voogt
Stationspark 550
NL-3364 DA Sliedrecht
Phone: ++31 184 41 41 31
FAX: ++31 184 42 36 11
EMAIL: software@tritec.nl

Malaysia

Flash Technology
Mr. Teo Kian Hock
No 61, # 04-15 Kaki Bukit Av 1
Shun Li Industrial Park
SGP-Singapore 417943
Phone: ++65 6749 6168
FAX: ++65 6749 6138
EMAIL: flashsgp@pacific.net.sg

Netherlands

Tritec Benelux B.V.
Mr. Robbert de Voogt
Stationspark 550
NL-3364 DA Sliedrecht
Phone: ++31 184 41 41 31
FAX: ++31 184 42 36 11
EMAIL: software@tritec.nl

New Zealand

Embedded Logic Solutions Pty L
Mr. Ramzi Kattan
391 Hume Highway
Bankstown NSW 2200
Phone: ++61 2 9793 9542
FAX: ++61 2 9790 1183
EMAIL: sales@emlogic.com.au

Norway

Nohau Elektronik AB
Mr. Greger Andersson
Derbyvägen 4
S-21235 Malmö
Phone: ++46 40 59 22 00
FAX: ++46 40 59 22 29
EMAIL: info@nohau.se

Poland

Quantum Sp.z o.o. Korp. Transf
Mr. Czeslaw Bil
ul. Skwierzynska 21
53-521 Wrocław
Phone: ++48 71 362 6356
FAX: ++48 71 362 6357
EMAIL: bil@quantum.com.pl

Portugal

Captura Electronica, SCCL
Mr. Juan Martinez
c/Albert Einstein s/n
Edificio Forum de la Tecnol.
E-08042 Barcelona
Phone: ++34 93 291 76 33
FAX: ++34 93 291 76 35
EMAIL: info@captura-el.com

Singapore

Flash Technology
Mr. Teo Kian Hock
No 61, # 04-15 Kaki Bukit Av 1
Shun Li Industrial Park
SGP-Singapore 417943
Phone: ++65 6749 6168
FAX: ++65 6749 6138
EMAIL: flashsgp@pacific.net.sg

South Korea

MDS Technology Co., Ltd.
Mr. Hyunchul Kim
15F Kolon Digital Tower Vilant
#222-7, Guro 3dong, Guro-gu
Seoul, 152-848, ROK
Phone: ++82 2 2106 6000
FAX: ++82 2 2106 6004
EMAIL: trace32@mdstec.com

Spain

Captura Electronica, SCCL
Mr. Juan Martinez
c/Albert Einstein s/n
Edificio Forum de la Tecnol.
E-08042 Barcelona
Phone: ++34 93 291 76 33
FAX: ++34 93 291 76 35
EMAIL: info@captura-el.com

Sweden

Nohau Elektronik AB
Mr. Greger Andersson
Derbyvägen 4
SE-21235 Malmö
Phone: ++46 40 59 22 00
FAX: ++46 40 59 22 29
EMAIL: info@nohau.se

Switzerland

JDT Jberg DatenTechnik
Mr. Andreas Jberg
Zimmerstrasse 2
CH-5734 Reinach AG
Phone: ++41 62 7710 886
FAX: ++41 62 7717 187
EMAIL: Andreas.Jberg@jdt.ch

Taiwan

Superlink Technology Corp.
Mr. Sulin Huang
3F-8, No. 77, Shin-Tai-Wu Rd. Sec1
Taipei Hsien 221, Taiwan, R.O.C.
Phone: ++886 2 26983456
FAX: ++886 2 26983535
EMAIL: stc@tpts1.seed.net.tw

Turkey

Bildem Bilgisayar Ltd. Sti.
Mr. Hakan Yavuz
Koroglu Cad. 64/3 G.O.Pasa
TR-06700 Ankara
Phone: ++90 312 4472700
FAX: ++90 312 4472702
EMAIL: info@bildem.com.tr

UK

Lauterbach Ltd.
Mr. Barry Lock
11 Basepoint Enterprise Centre
Stroudley Rd
Basingstoke, Hants RG24 8UP
Phone: ++44 (0) 1256-333690
FAX: ++44 (0) 1256-336661
EMAIL: info_uk@lauterbach.com

USA East

Lauterbach Inc.
Mr. Udo Zoettler
4 Mount Royal Ave.
USA-Marlborough, MA 01752
Phone: ++1 508 303 6812
FAX: ++1 508 303 6813
EMAIL: info_us@lauterbach.com

USA West

Lauterbach Inc.
Mr. Jerry Flake
13256 SW Hillshire Drive
USA-Tigard, OR 97223
Phone: ++1 503 524 2222
FAX: (503) 524 2223
EMAIL: jerry.flake@lauterbach.com

Additional Information

<http://www.lauterbach.com>

Lauterbach Datentechnik GmbH

Fichtenstr. 27
D-85649 Hofolding
Tel. ++49 8104 8943-188 FAX -187
info@lauterbach.com
<http://www.lauterbach.de>

Lauterbach Inc.

4 Mount Royal Ave.
Marlboro MA 01752
Phone (508) 303 6812 FAX (508) 303 6813
info_us@lauterbach.com
<http://www.lauterbach.com/usa>

Lauterbach Ltd.

11 Basepoint Enterprise Ctre Stroudley Road
Basingstoke, Hants RG24 8UP
Phone ++44-1256-333-690 FAX -661
info_uk@lauterbach.com
<http://www.lauterbach.co.uk>

Lauterbach Japan, Ltd.

3-9-5 Shinyokohama Kouhoku-ku
Yokohama-shi Japan 222-0033
Phone ++81-45-477-4511 FAX -4519
info_j@lauterbach.com
<http://www.lauterbach.co.jp>

Lauterbach s.r.l.

Lauterbach s.r.l.
Via Enzo Ferrieri 12
I-20153 Milano
Phone ++39 02 45490282
FAX ++39 02 45490428
info_it@lauterbach.it
<http://www.lauterbach.it>

Disclaimer

The information presented is intended to give overview information only.
Changes and technical enhancements or modifications can be made with-