


Models 2720, 2725, & 2730

FUNCTION / ARBITRARY WAVEFORM GENERATORS

- **Function Generator Simplicity**
- **Intuitive User Interface**
- **Unmatched Waveform Precision**
- **Largest Memory**
- **Programmable Synchronization**
- **AM / FM / FSK Modulation**
- **User-Definable Pulse**
- **Three-Year Warranty**

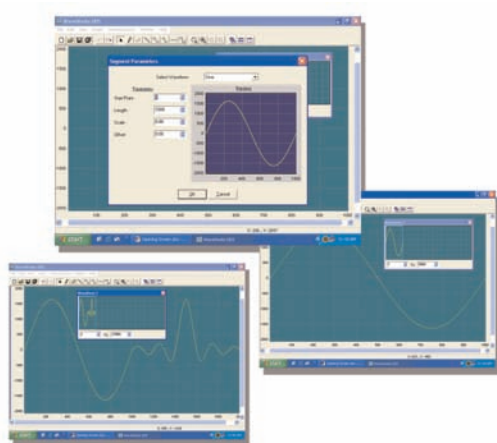

Custom waveforms may be imported or created using Waveworks DDS software, downloaded to the 2700, and reproduced in seconds.

2700 Series – Function / Arbitrary Waveform Generators

TEGAM combines the best of both worlds in signal generation by introducing the new 2700 series, function/arbitrary waveform generators. Direct Digital Synthesis (DDS) and True Arbitrary Waveform generators each have unique advantages relative to signal generation and performance. Until now, the user had to make a choice between the two.

The 2700 series are designed with the low cost, ease of use, sweep and modulation capabilities of the DDS architecture while maintaining the ability to produce true arbitrary waveforms with unprecedented accuracy and resolution. The 2700 hybrid design is a breakthrough in low cost signal generation.

Highest Resolution & Speed

Create and generate high-speed, standard or user-defined waveforms ranging from 1 μ Hz to 50 MHz. Any of the 2700 series is ideal for replacement of traditional function,

sine, pulse or sweep generators with the addition of true arbitrary waveform capabilities. Using a hybrid design, the 2700 series combines the simplicity of a function generator with the precision of a true arbitrary waveform generator. It outperforms the alternatives by offering core design advantages that make a difference. These include 14-bit vertical resolution, up to 4 MB segmentable RAM, 0.01 S/s – 125 MS/s sampling, programmable sync pulse, sine waves to 50 MHz, sweeps from 10 ms to 500 s, internal/external modulation and more.

Standard Wave Types

Commonly used waveforms are easily defined via the 2700's intuitive front panel. The instruments' function generator produces standard sine, square, triangle/ramp and pulse waveforms. User-definable parameters include frequency, amplitude, offset, phase, duty cycle, and rise/fall.



Prices and specifications subject to change without notice.



TEGAM®

YOUR GLOBAL SOURCE FOR TEST
AND MEASUREMENT SOLUTIONS

Models 2720, 2725, & 2730

FUNCTION / ARBITRARY WAVEFORM GENERATORS

Arbitrary Wave Creation

WaveWorks DDS™ software is a valuable tool for creating and downloading arbitrary waveforms to the 2700 series function / arbitrary waveform generators. It has the capability to import wave data directly from popular Agilent and Tektronix oscilloscopes via the GPIB or RS-232C interfaces or from *.txt file types. WaveWorks DDS™ includes 9 predefined wave templates, point-by-point editing, insert functions, and other tools to make wave creation the way it should be... simple.

In addition, arbitrary waveforms may be created through the instrument's front panel by point editing or use of standard arbitrary wave profiles. These include sine, Gaussian, triangle, square, noise, ramp up, ramp down, $\sin(x)/x$, exponential up, and exponential down. Once the arbitrary wave data is written to the instrument's RAM, it is executed with precision. There is no unwanted digital processing that could compromise wave replication as with traditional DDS designs.

Ideal for Pulse Generation

Create pulse waveforms with repetition rates from 0.5 mHz to 25 MHz. Vary the width, rise or fall time of a standard pulse waveform with the turn of a dial or numerical entry. Alternatively, you can create a customized pulse through use of the instrument's arbitrary wave functions. Using two arbitrary data points,

the 2725 can produce a pulse rise/fall time as low as 6 ns with repetition rates to 62.5 MHz!

Extended Waveform Memory

Don't let waveform memory restrictions compromise the integrity of your waveform. Other waveform generators limit the maximum size of arbitrary waveforms to kilobytes. At higher sample speeds, the integrity of your waveform can be compromised. The 2700 series addresses this problem by offering up to 4 MB of non-volatile RAM for arbitrary waveform storage. It executes wave data with true arbitrary precision with no interpolation and no skipping or repeating of waveform data.

Exceptional Value

The 2700 series function / arbitrary waveform generators provide exceptional value through performance and quality. No other function/arbitrary generator matches the cost/benefit advantage of these instruments.

TEGAM offers a three-year warranty and a 30-day, no-risk trial period for any of the three selections. Contact a TEGAM representative to learn more about the 2700 series or our other high-performance, waveform solutions.

Some Applications Include:

Aerospace, Automated Test Systems, Communications, Education, Medical, MEMS, Military, Research and Development, and Sensor Excitation/Simulation.

Included Accessories:

120 VAC Line Cord
– P/N 161006600

RS-232C Cable (6 ft.)
– P/N 740565-6

User Manual CD
– P/N 810050-CD for 2720
– P/N 810051-CD for 2725
– P/N 810052-CD for 2730

WaveWorks DDS Software CD
– P/N 200024.

Optional Accessories:

Single Unit Rack Kit
– P/N 2701

Dual Unit Rack Kit
– P/N 2702

BNC Cable (3ft.)
– P/N CBL-3102


BNC Tee Connector
– P/N BNC-3285

User Manual Printed Version
– P/N 810050 for 2720
– P/N 810051 for 2725
– P/N 810052 for 2730

Heavy Duty GPIB Cables
– P/N 1583-3 (3 ft.)
– P/N 1583-6 (6 ft.)
– P/N 1583-9 (9 ft.).


LabVIEW Driver available.

Product and company names listed herein are trademarks or registered trademarks of their respective companies.

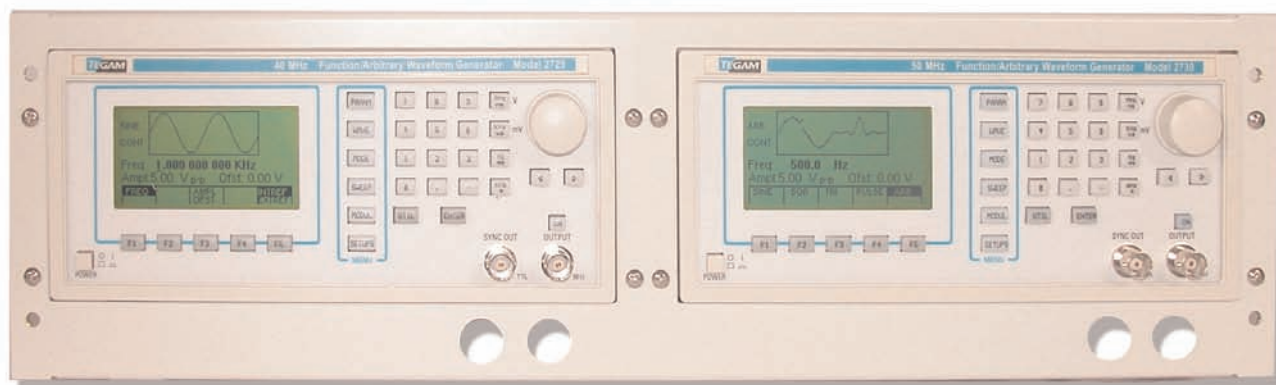

Two units can be synchronized for multiple channel operation. Precise phase offsets can be programmed by the user.

Models 2720, 2725, & 2730

FUNCTION / ARBITRARY WAVEFORM GENERATORS

Specifications

2720

2725

2730

| Function Generator Waveforms | | | | |
|---|--|--|-----------|--|
| Sine | 10 μ Hz to 31 MHz | 1 μ Hz to 40 MHz | | 1 μ Hz to 50 MHz |
| Square | 10 μ Hz to 31 MHz | 1 μ Hz to 40 MHz | | 1 μ Hz to 50 MHz |
| Triangle (Ramp) | 10 μ Hz to 500 kHz | 1 μ Hz to 5 MHz | | 1 μ Hz to 5 MHz |
| Pulse | N/A | .5 mHz to 10 MHz | | .5 mHz to 25 MHz |
| Accuracy | 0.002% (20 ppm) | 0.001% (10 ppm) | | 0.001% (10 ppm) |
| Resolution | 10 digits (10 μ Hz) | 12 digits (1 μ Hz) | | 12 digits (1 μ Hz) |
| Arbitrary Waveforms | | | | |
| Storage | 1 Waveform-Segmentable | 1 Waveform-Segmentable | | 1 Waveform-Segmentable |
| Horizontal Resolution | 2 to 500,000 points | 2 to 1,000,000 points | | 2 to 4,000,000 points |
| Vertical Resolution | 12 bits (-2,047 to + 2,047) | 14 bits (-8,191 to + 8,191) | | 14 bits (-8,191 to + 8,191) |
| Sampling Rate | 0.02 S/s to 50 MS/s (20 ns to 50 s) | 0.01 S/s to 80 MS/s (12.5 ns to 100 s) | | 0.01 S/s to 125 MS/s (8 ns to 100 s) |
| Sampling Resolution | 4-digits resolution (limited to 10 ps) and 0.002% accuracy. | 4-digits resolution (limited to 1 ps) and 0.001% accuracy. | | 4-digits resolution (limited to 1 ps) and 0.001% accuracy. |
| Waveform Characteristics | | | | |
| Analog Filters | 9 pole Elliptic 5 pole Bessel | 9 pole Elliptic 5 pole Bessel | | 9 pole Elliptic 5 pole Bessel |
| Harmonic Distortion | DC-100 kHz | -60 dBc | | DC-20 kHz |
| | 100 kHz-1 MHz | -45 dBc | -65 dBc | 20 kHz-100 MHz |
| | 1 MHz-15 MHz | -35 dBc | -60 dBc | 100 kHz-5 MHz |
| | 15 MHz-30 MHz | -25 dBc | -45 dBc | 5 MHz-50 MHz |
| Spurious | DC-1 MHz | < -65 dBc | < -65 dBc | DC-1 MHz |
| Square Rise/Fall | < 12 ns (10% to 90%) at full amplitude into 50 Ω . | < 8 ns (10% to 90%) at full amplitude into 50 Ω . | | < 6 ns (10% to 90%) at full amplitude into 50 Ω . |
| Duty Cycle | 20% to 80% to 5 MHz | 20% to 80% to 10 MHz | | 20% to 80% to 10 MHz |
| | 40% to 60% to 20 MHz | 40% to 60% to 30 MHz | | 40% to 60% to 30 MHz |
| Symmetry at 50% | < 1% | < .5% | | < .5% |
| Overshoot | < 2% of p-p \pm 50 mV | < 3% of p-p \pm 50 mV | | < 3% of p-p \pm 50 mV |
| Amplitude & Offset | | | | |
| Amplitude Range | 10 mV-10 Vp-p, 50 Ω | 10 mV-10 Vp-p, 50 Ω | | 10 mV-10 Vp-p, 50 Ω |
| Resolution | 3-1/2 digits | 3-1/2 digits | | 3-1/2 digits |
| Accuracy | 1% \pm 20 mV (1 V-10 V) | 1% \pm 20 mV (1 V-10 V) | | 1% \pm 20 mV (1 V-10 V) |
| Flatness | 0.2 dB at 1 MHz | 0.1 dB at 10 MHz | | 0.1 dB at 10 MHz |
| | 0.5 dB at 20 MHz | 1.0 dB at 40 MHz | | 1.0 dB at 50 MHz |
| <i>Amplitude range, resolution, and accuracy are dependent upon the offset.</i> | | | | |
| Offset Range | \pm 4.5 V into 50 Ω | \pm 4.99 V into 50 Ω | | \pm 4.99 V into 50 Ω |
| Offset Resolution | 3 digits, 10 mV | 3 digits, 10 mV | | 3 digits, 10 mV |
| Offset Accuracy | 1% \pm 10 mV | 1% \pm 10 mV | | 1% \pm 10 mV |
| <i>Offset range, resolution, and accuracy are dependent upon the amplitude setting.</i> | | | | |
| Operational Modes | | | | |
| Continuous | Output runs continuously. | Output runs continuously. | | Output runs continuously. |
| Triggered | Output quiescent until triggered (internal, external, GPIB or manual), then one waveform period is generated. Up to 10 MHz trig rate for ARB wave forms and 5 MHz in DDS mode. | Output quiescent until triggered (internal, external, GPIB or manual), then one waveform period is generated. Up to 20 MHz trig rate for ARB waveforms and 10 MHz in DDS mode. | | Output quiescent until triggered (internal, external, GPIB or manual), then one waveform period is generated. Up to 20 MHz trig rate for ARB waveforms and 10 MHz in DDS mode. |
| Gated | Same as triggered mode except wave form is executed for the duration of the gated signal. The last waveform period started is completed. | Same as triggered mode except wave-form is executed for the duration of the gated signal. The last waveform period started is completed. | | Same as triggered mode except wave-form is executed for the duration of the gated signal. The last waveform period started is completed. |
| Burst | Same as triggered mode for wave form periods from 1 to 99,999. | Same as triggered mode for waveform periods from 2 to 999,999. | | Same as triggered mode for waveform periods from 2 to 999,999. |
| Phase | -360° to +360° (0.1° resolution) | -360° to +360° (0.1° resolution) | | -360° to +360° (0.1° resolution) |

Models 2720, 2725, & 2730

FUNCTION / ARBITRARY WAVEFORM GENERATOR

Specifications

2720

2725

2730

| Trigger Sources | | | | | |
|----------------------------|---|--|---------------------------|---|--|
| Internal | | | | | |
| Repetition | 0.01 Hz -1 MHz | 0.01 Hz -1 MHz | | 0.01 Hz -1 MHz | |
| Resolution | 4 digits | 4 digits | | 4 digits | |
| Accuracy | ±0.002% | ±0.002% | | ±0.002% | |
| External | | Front panel, rear panel BNC | | Front panel, rear panel BNC | |
| Outputs | | | | | |
| Output Impedance | Front Panel/50 Ω | Front Panel/50 Ω | | Front Panel/50 Ω | |
| Synchronous Output | + TTL pulse at selected F, 50 Ω. | + TTL pulse at selected F, 50 Ω. | | + TTL pulse at selected F, 50 Ω. | |
| Reference Output | 10 MHz, TTL | 10 MHz or ARB clock, TTL | | 10 MHz, or ARB clock, TTL | |
| Inputs | | | | | |
| Trigger Input | TTL, 1 kΩ nominal Z, Max. 10 MHz, minimum width 50 ns. | TTL, 10 kΩ nominal Z, Max. 20 MHz, minimum width 20 ns. | | TTL, 10 kΩ nominal Z, Max. 20 MHz, minimum width 20 ns. | |
| Modulation Input | 5 Vp-p for 100% modulation, 10 kΩ input Z, DC to >20 kHz bandwidth. | 5 Vp-p for 100% modulation, 10 kΩ input Z, DC to >50 kHz bandwidth. | | 5 Vp-p for 100% modulation, 10 kΩ input Z, DC to >50 kHz bandwidth. | |
| Reference Input | TTL, 10 MHz | TTL, 10 MHz | | TTL, 10 MHz | |
| Summing Input | N/A | 5 Vp-p maximum | | 5 Vp-p maximum | |
| Modulation Characteristics | | | | | |
| Amplitude Modulation | | | | | |
| Internal | 0.01 Hz-20 kHz sine, square or triangle. Variable depth from 0% to 100%. | 0.01 Hz-20 kHz sine, square or triangle. Variable depth from 0% to 100%. | | 0.01 Hz-20 kHz sine, square or triangle. Variable depth from 0% to 100%. | |
| External | 5 Vp-p for 100% modulation | 5 Vp-p for 100% modulation | | 5 Vp-p for 100% modulation | |
| Frequency Modulation | | | | | |
| Internal | 0.01 Hz-20 kHz sine, square or triangle. | 0.01 Hz-20 kHz sine, square or triangle. | | 0.01 Hz-20 kHz sine, square or triangle. | |
| External | 5 Vp-p for 100% deviation | 5 Vp-p for 100% deviation | | 5 Vp-p for 100% deviation | |
| FSK | | | | | |
| Internal | 0.01 Hz - 1 MHz. | 0.01 Hz - 1 MHz. | | 0.01 Hz - 1 MHz. | |
| External | 1 MHz max. | 1 MHz max. | | 1 MHz max. | |
| Sweep Characteristics | | | | | |
| Sweep Type | Linear and logarithmic | Linear and logarithmic | | Linear and logarithmic | |
| Sweep Time | 20 ms to 500 s. | 10 ms to 500 s. | | 10 ms to 500 s. | |
| Sweep Trigger | Internal, external, continuous or burst | Internal, external, continuous or burst | | Internal, external, continuous or burst | |
| Computer Interface | | | | | |
| GPIB | IEEE 488.2 SCPI compatible | | | | |
| RS-232C | 115k baud, max. | | | | |
| Wave Creation Software | | | | | |
| | | WaveWorks DDS™, Wave Creation Software for Windows™ is included at no additional charge. | | | |
| General | | | | | |
| Operating Temperature | 32°F to 122°F (0°C to 50°C) | | | | |
| Front Panel Storage | 49 full panel settings | | | | |
| Dimensions | Height: 3.5 in. (88 mm) | Width: 8.4 in. (213 mm) | Length: 10.8 in. (275 mm) | | |
| Weight | 6.6 lbs (3 kg) net | | | | |
| Power | 110/220 V, ±15% (93-256 V) 40 VA max. | | | | |
| Humidity | 0 to 95% RH, 32°F to 86°F (0°C to 30°C) | | | | |
| EMC | EN55011, EN 55082 | | | | |
| Safety | Designed to EN61010, CE Marked | | | | |